

# INSTRUCTIONS FOR USING The CHAMP Junior 2



Fig 1 25 mm Riser



Fig 2 Adaptor Bolt



Fig 3 CHAMP Jnr 2 secured on Riser

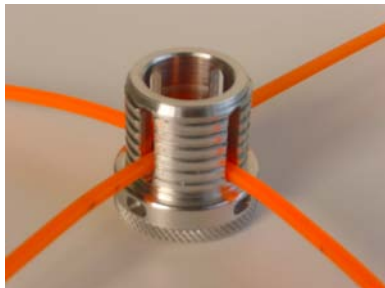


Fig 4 CHAMP Jnr 2 loaded 2 pieces of line



CHAMP Jnr. 2 and 2 piece components

## INSTALLATION

1. The CHAMP Jnr 2. easily adapts to ALL Straight Shaft Brushcutters and has been especially designed for Light Weight models .These machines are all capable of accepting a Blade—Jnr. mounts on the same 25mm “riser” see Fig. 1 . The adaptor Bolt Fig 2 must first be removed to reveal the Bearing Cover Plate and the 25mm Riser
2. Centre the base of The CHAMP Jnr 2 on the Riser and secure with (Original) LH Nut Fig 3.The Base will accommodate a socket spanner upto 35 mm !.
3. The CHAMP Jnr 2 Cutting Cylinder is provided with 4 “c” spanner slots.
4. A “C” Spanner is included with each Head sold.
5. The CHAMP Jnr’s 2 - 2 piece simplified design , all metal construction, no moving parts and ease of use is innovation at its best !!

## LINE LOADING

1. The CHAMP Jnr.2 only accepts “Fixed Length” line recommended length is 35 cms.
1. On Machine line reloading—just “unlock” the head and wind open to replace line
2. **SuperCut 3 mm ■ profile line is specified.**
3. One or Two pieces of line is inserted through the Head and extended equally to give 2 or 4 cutters.
4. Line wear is spread evenly and extended cutting cycles are regularly achieved.
5. SuperCut Medium 3mm is offered precut  
BIG Pack 120 pieces 42M @ \$55.00  
MINIPack 40 pieces 14 M @ \$19.00

## OPERATING GUIDE LINES

1. Brushcutters should be operated at maximum revs. **Should “overloading” be detected while using 4 cutters 1 piece of line should be removed.**
2. Don’t operate with an unbalanced Head—remove broken line.
3. **LOCTITE “anti-sieze”** stick available at hardware stores can be applied to the thread of the cutting cylinder to assist “unlocking” for line changing after extended use.
4. **A “C” Spanner is provided to assist with “unlocking”**

**MADE AND DISTRUBUTED IN AUSTRALIA BY  
Alex Brushcutter Heads 1800 180 141  
Australian Design Registration PENDING**

**“BRUSHCUTTING JUST GOT SIMPLE”**

## SAFE OPERATION

**Always use protective guards — foot wear & eyewear when using any brushcutter**